

**FOX & GUNN**  **90**  
Trade tools & hardware for over 90 years 100% OWNED SINCE 1929

# PRODUCT CATALOGUE 2019/20







# MAKING THE WORKPLACE A BETTER PLACE™

Delivering the most innovative, well-crafted safety gear & training solutions that safety professionals demand, workers desire and job sites require.

Providing protection, promoting prevention and ensuring compliance. All driving towards the goal of ZERO injuries.







**Accidents from dropped objects account for the fourth highest proportion of all workplace incidents in Australia.**

**PREVENTABLE STATS**

**Australia**

**19**

Fatalities per year

**10%**

of all Workplace incidents

**New Zealand**

**82%**

Fatalities 2013-2019

**10%**

of all Workplace incidents

**PRYME TIP:**

Luck is bad policy – Drops will happen – create a Drops Free Zone™

**PREVENT THIS FROM HAPPENING. Talk to us today: [sales@pryme.com.au](mailto:sales@pryme.com.au)**

**EMPLOYER OBLIGATIONS**

**AUSTRALIA**

Sections 34-38 of the Workplace Health & Safety (WHS) Act 2011, requires employers to minimise risk where reasonably practicable to employees. Safe Work Australia published the "Falling Objects Fact Sheet" in 2012 that required tools and materials to be tethered when working at heights.

**NEW ZEALAND**

**All tools and equipment are to be attached by a cord unless another effective method is used to prevent a falling hazard** to meet the requirements of the Health Safety in Employment Act 1992. **AS/NZS 4488 also requires all tools and equipment to be tethered** when working at heights.





## WHAT DOES ANSI/ISEA 121 ENTAIL?

The ANSI (American National Standards Institute) and ISEA (International Safety Equipment Association) 121 – 2018 is a standard that consists of design, testing, performance and labelling requirements for tool tethering systems and containers used to transport, secure and position tools and equipment at heights.

The 121 standard gives workers guidance for best practice on what equipment to use when implementing a tethering program. How to implement a program, and assistance in doing so will be provided by your safety expert.

## THE CATEGORIES OF EQUIPMENT IN THE ANSI/ISEA 121-2018 STANDARD

### ANCHOR & TOOL ATTACHMENTS



### TOOL TETHERS



### CONTAINERS



## DROP FREE ZONE

ESTABLISHING  
BEST PRACTICE



### A CONTAINERS

Bags and buckets used to transport tools and equipment to and from at heights work zones. Tool pouches, bags and hoist buckets/bags should have a secure closure or "top" that can cover contents and prevent them from spilling if tipped.

If a container does not have a secure closure it must have tethering points available.

### B TOOL TETHERS


Tethering is the retention of the tools and equipment being used to the anchor points that hold them, most commonly with a tool lanyard. These lanyards should have the proper connections on each end for the tools and anchors being used. They should also be made with a shock-absorbing design whenever possible.

### C TOOL AND ANCHOR ATTACHMENTS


Retrofit attachment points installed onto tools, equipment or fixed anchor locations for connecting lanyards. Most tools do not come with a secure attachment point built into the tool. In these situations, a secure attachment point must be created.

### COLOUR COORDINATE FOR QUICK AND EASY IDENTIFICATION

Ergodyne Objects at Heights Solutions are colour coordinated by capacity ranges.

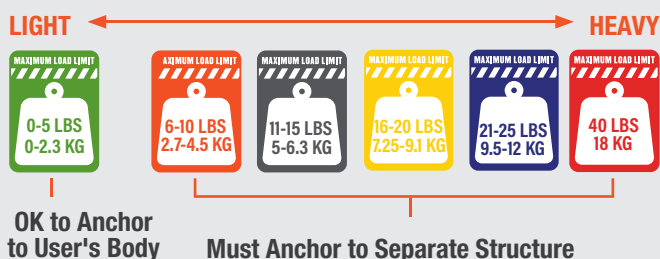



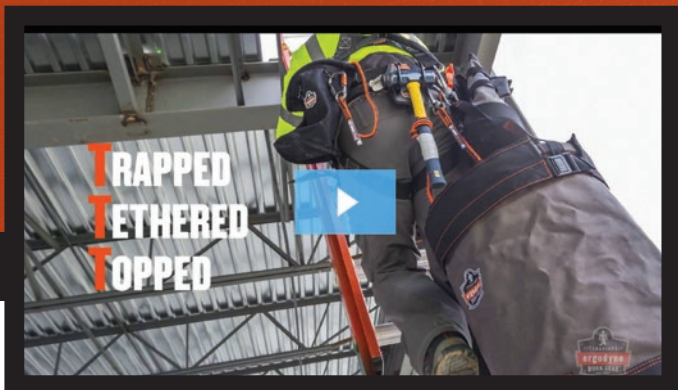

## SUPPORT & TRAINING VIDEOS

Learn more by visiting our comprehensive online video library.

[www.pryme.com.au/video-library](http://www.pryme.com.au/video-library)

## PRYME BLOG

The Pryme Blog is the place for industry insights, safety topics, regulations and the latest news and trends. Access our blog via: [www.pryme.com.au/blogs](http://www.pryme.com.au/blogs)



## PRODUCT AND INFORMATIONAL RESOURCES


We have various product and informational flyers & brochures available to learn more about our products and general information about creating a drops free zone. Reach out to us to have access to our popular material: [sales@pryme.net.au](mailto:sales@pryme.net.au)



1

### IDENTIFY

WHAT PRODUCT YOU WANT TO SECURE AND HOW



2

### TRAP

CREATE A CONNECTION/ TRAP POINT

Trapping refers to retrofitting a connection point onto a tool for a more secure attachment.

3

### TETHER

LINK THE TRAP POINT BETWEEN YOU AND THE TOOL

Once all tools have a connection point the appropriate tethering solution can be selected. Consider the following factors to select the appropriate solution: weight of tool, type of connector(s) on lanyard, clearance, reach, and snag hazard.

4

### CONNECT

SECURING THE TETHERING DEVICE TO A DETERMINED ANCHOR POINT

As a final step, it is imperative to connect to a determined and secure anchor point. This could be a tool belt, topping bucket, bag, or by using an approved static anchor point.







# SQUIDS


## TOOL TETHERING KITS

Ergodyne is your go-to source for safely and efficiently securing your objects at heights. We are dedicated to keeping workers safe and productive on the job. Effectively securing objects at heights is a 4-step process and involves three key product types: **traps, lanyards, and connectors.**



## NOT SURE WHICH KIT TO GRAB?

Jump online to use our Tool Tethering Application. Select which tool you want to tether, follow the steps, and we'll show you the best kit to use.

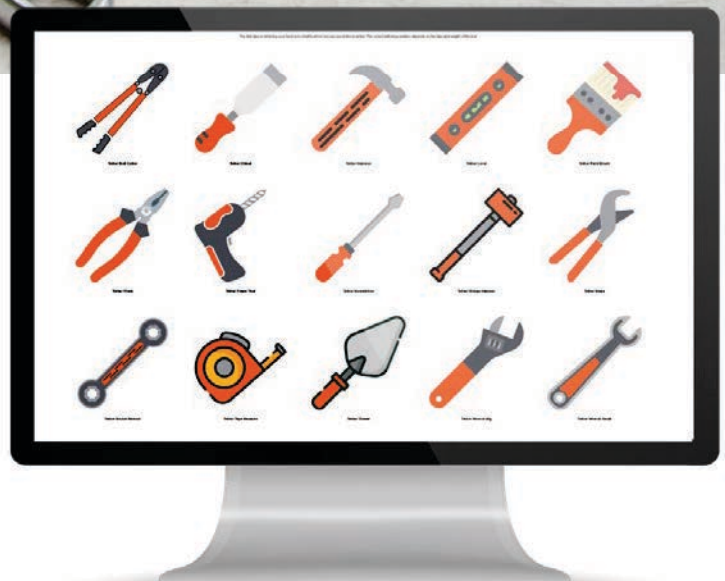

[WWW.PRYME.COM.AU/TOOL-TETHERING-SOLUTIONS](http://WWW.PRYME.COM.AU/TOOL-TETHERING-SOLUTIONS)



# SQUIDS

## TOOL TETHERING KITS

### 0.9KG TOOL TETHERING KIT



#### Tether up to six 0.9kg tools

**3180**

##### Kit includes:

- 3700: 4.5" (11.5cm) web tool tails (6 pack)
- 3755: self-adhering tape trap requires no heat
- 3130S: coiled lanyard design prevents snagging
- Approved to the ANSI/ISEA 121-2018 standard



Part No.	Description	UOM
19650	3180 Kit	1 Unit

### 2.3KG TOOL TETHERING KIT



#### Tether up to four 2.3kg tools

**3181**

##### Kit includes:

- 3103: accessory kit - detachable loops (3-pack)
- 3755: self-adhering tape trap requires no heat
- 3102F(x): detachable single carabiner
- Approved to the ANSI/ISEA 121-2018 standard



Part No.	Description	UOM
19651	3181 Kit	1 Unit

### 4.5KG TOOL TETHERING KIT



#### Tether up to three 4.5kg tools

**3182**

##### Kit includes:

- 3713: elastic loop tool tails swivel (3-pack)
- 3755: self-adhering tape trap requires no heat
- 3100F(x): tool lanyard single carabiner
- Approved to the ANSI/ISEA 121-2018 standard



Part No.	Description	UOM
19652	3182 Kit	1 Unit

### TAPE MEASURE TETHERING KIT



#### Tether one standard tape measure

**3190/93**

##### Both kits include:

- 3770: Tape measure trap
- Approved to the ANSI/ISEA 121-2018 standard
- 3190: 3130S: Coiled lanyard prevents snagging
- 3193: 3100F(x): Tool lanyard single carabiner



Part No.	Description	UOM
19660	3190 Kit	1 Unit
19663	3193 Kit	1 Unit



## POWER TOOL TETHERING KIT



### KIT INCLUDES:

- 3780L: power tool trap (large)
- 3100F(x): tool lanyard single carabiner
- Approved to the ANSI/ISEA 121-2018 standard

**3191**



Part No.	Description	UOM
19661	3191 Kit	1 Unit

## WRIST LANYARD TETHERING KIT



### KIT INCLUDES:

- 3103: accessory kit - detachable loops (3pack)
- 3755: self-adhering tape trap requires no heat
- 3116: pull-on wrist lanyard with buckle
- Approved to the ANSI/ISEA 121-2018 standard

**3192**



Part No.	Description	UOM
19662	3192 Kit	1 Unit

## SCREWDRIVER TETHERING



### KIT INCLUDES:

- 3740: Variety Pack tethers small hand tools
- 3156: Coil Low Profile Lanyard – Carabiner
- Approved to the ANSI/ISEA 121-2018 standard

**3194**



Part No.	Description	UOM
19664	3194 Kit	1 Unit

## PHONE TETHERING KIT



### KIT INCLUDES:

- 3760: Plus attached to cell phones
- 3156: Coil Low Profile Lanyard – Carabiner
- Approved to the ANSI/ISEA 121-2018 standard

**3195**



Part No.	Description	UOM
19665	3195 Kit	1 Unit





# SQUIDS

## TOOL TRAPS

### ATTACHMENT SERIES (HAND TOOLS)

**SECURE CONNECTION**  
FULLY ENCLOSED ATTACHMENT POINTS

**VARIETY OF SIZES**  
FITS MULTIPLE HAND TOOLS

**FRICTION GRIP HOLD**  
NO ADHESIVES OR HEAT REQUIRED TO APPLY

**EASY INSTALLMENT**  
IN ONE TO TWO STEPS

**VERSATILE**





## HAND TOOL TRAP - SLIPS



See left hand page for examples

Available in four sizes

### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- ABS plastic outer ring for strength and durability
- Flexible inner core grips tool after application
- Swivelling ABS connecting ring for tethering
- One-piece, one-step attachment onto hand tools
- Fits tools 0.035" to 0.40"
- One time use, replace after removed

**3740**



Part No.	Description	UOM
19740	S   4-pack	6 Units
19741	M   4-pack	6 Units
19742	L   4-pack	6 Units
19743	XL   4-pack	6 Units
19744	Variety Pack (all 4 Sizes)	6 Units

## ELASTIC TOOL TAILS 3-PACK



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- Stretch cord surrounded by tubular nylon webbing
- Use with tool trap to create retrofit tether point
- Adjustable barrel lock for tool attachment
- Fully enclosed plated O-ring for secure attachment
- Doubles as an anchor loop for belt, harness or separate structure
- Standard length: 38cm | 3703 Extended length: 46cm
- Third-party tested using a 2:1 safety factor

**3703/13**



Part No.	Description	UOM
19765	3713: Lime with swivel   38cm   4.6kg   3-pack	6 Units
19767	3703: Lime   38cm   6.8kg   3-pack	6 Units
19769	3703: Lime   46cm   6.8kg   3-pack	6 Units

## WEB TOOL TAILS 6-PACK



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- Ultra strength nylon webbing
- Fully enclosed plated D-ring for secure attachment
- High tensile strength nylon thread
- Web catch with double stitch for more durable stopping point
- Available in five colour-coded lengths
- Third-party tested using a 2:1 safety factor

Used with tape traps; creates retrofit tether point

**3700**



Part No.	Description	UOM
19701	Variety (all 5 sizes)	6 Units
19703	9cm   6-pack	6 Units
19704	11.5cm   6-pack	6 Units
19705	14cm   6-pack	6 Units
19706	16.5cm   6-pack	6 Units
19708	21.5cm   6-pack	6 Units

## DETACHABLE LOOPS



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- Adjustable barrel lock for tool attachment
- Modular quick connecting buckle for exchanging multiple tools
- Compatible with 3102: Detachable Tool Lanyard
- Length: 32cm
- Third-party tested using a 2:1 safety factor

**3103**



Part No.	Description	UOM
19068	Black   32cm   2.3kg   3-pack	6 Units
19069	Lime   32cm   2.3kg   3-pack	6 Units

## ACCESSORY ANCHOR



### KIT INCLUDES:


3175

- Approved to the ANSI/ISEA 121-2018 standard
- Heavy-duty 45mm polyester webbing
- Nickel-plated iron D-ring
- 840D nylon wear protector sleeve
- Not for climbing or fall arrest
- Length 23.5in (60cm)
- Static anchor maximum safe working capacity: 181kg
- Tool Tail™ maximum safe working capacity: 18kg



Part No.	Description	UOM
19175	Accessory Anchor   Black	6 Units

## TOOL SHACKLE TRAPS

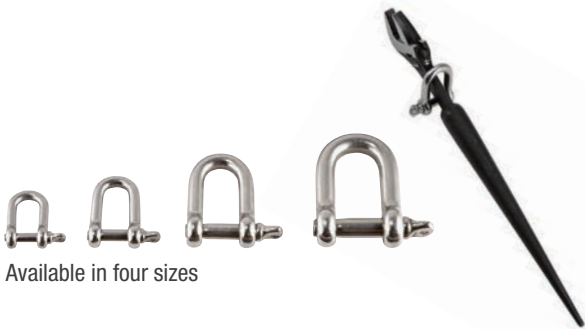

Available in four sizes

### KIT INCLUDES:

3790

- Approved to the ANSI/ISEA 121-2018 standard
- Requires no heat source for application
- No adhesives so it can be removed with no mess
- Fibreglass reinforcement for added durability
- Provides added grip to the handle of a tool
- Third-party tested using a 2:1 safety factor
- Cut & puncture resistant



Used with tool tail; creates retrofit tether point

Part No.	Description	UOM
19792	Shackle   S   6.8kg   2-pack	6 Units
19793	Shackle   M   6.8kg   2-pack	6 Units
19794	Shackle   L   6.8kg   2-pack	6 Units
19795	Shackle   XL   6.8kg   2-pack	6 Units

## COLD SHRINK TRAP




Available in three sizes

### KIT INCLUDES:

3723/24/26

- Approved to the ANSI/ISEA 121-2018 standard
- Fits tool diameter range of 1.9 - 6.4cm
- 3M Cold Shrink technology requires no heat source
- No additional tools needed to ensure a secure connection on tool
- EPDM rubber material resists acids, alkalies and extreme temps
- Third-party tested using a 2:1 safety factor



Part No.	Description	UOM
19723	3723   Shrink Trap   7.6cm   2kg	6 Units
19724	3724   Shrink Trap   10.1cm   4.5kg	6 Units
19726	3726   Shrink Trap   15.2cm   6.8kg	6 Units

## SELF-ADHERING TAPE TRAP™



### KITS INCLUDE:

3755

- Approved to the ANSI/ISEA 121-2018 standard
- Requires no heat source for application
- No adhesives so it can be removed with no mess
- Fibreglass reinforcement for added durability
- Provides added grip to the handle of a tool
- Third-party tested using a 2:1 safety factor
- Cut & puncture resistant



Used with tool tail; creates retrofit tether point/biner

Part No.	Description	UOM
19755	Grey   3.7m x 2.5cm   4.5kg	6 Units
19756	Orange   3.7m x 2.5cm   4.5kg	6 Units









# SQUIDS TOOL TRAPS

## ATTACHMENT SERIES (INSTRUMENTS ETC.)

### SECURE CLOSURES

HOLD CELLPHONES AND  
OTHER INSTRUMENTS

### PATENTED DESIGNS

ALLOW FOR FULL FUNCTIONING OF YOUR  
INSTRUMENTS AND DO NOT IMPEDE THEIR USE

### DURABLE AND RESISTANT

DEVICES AND INSTRUMENTS COVERED  
IN PROTECTIVE MATERIALS

### REINFORCED MATERIALS

PASS STRINGENT DROP  
TESTING REQUIREMENTS



#### PRYME TIP:

Always choose a Shock Absorbing SQUIDS™ lanyard



## CELLPHONE TRAP - SLEEVE



### KIT INCLUDES:

**3760**

- Approved to the ANSI/ISEA 121-2018 standard
- Water-resistant primary material
- Clear touch screen window
- Steel grommet for tool lanyard attachment
- Zipper closure secures cellphone
- Standard size fits regular iPhones, Samsung, and LG cellphones
- Plus size fits iPhone+, Samsung, and LG cellphones
- Max tethering capacity of 1lbs. (0.5kg)



Part No.	Description	UOM
19762	Standard   Clear   0.5kg	6 Units
19763	Plus   Clear   0.5kg	6 Units

## TABLET TRAP - SLEEVE



### KIT INCLUDES:

**3765**

- Approved to the ANSI/ISEA 121-2018 standard
- Water-resistant primary material
- Clear touch screen window
- Steel grommet for tool lanyard attachment
- Zipper closure secures tablet
- Fits most standard tablets
- Max tethering capacity of 2lbs. (0.9kg)



Part No.	Description	UOM
19764	Standard   Clear   0.9kg	6 Units

## TAPE MEASURE TRAP



### KIT INCLUDES:

**3770**

- Approved to the ANSI/ISEA 121-2018 standard
- Polyester primary material
- Hook & loop straps secure tape measure
- Stainless steel belt clip
- Zinc-plated cast D-Ring
- Third-party tested using a 2:1 safety factor
- Large fits tape measures from 16'-25' (5m-8m)
- XL fits tape measures from 30'-35' (9m-10m)



Part No.	Description	UOM
19770	L   Orange   0.9kg	6 Units

## WATER BOTTLE / CANISTER TRAP - SLEEVE



### KITS INCLUDE:

**3775**

- Approved to the ANSI/ISEA 121-2018 standard
- Neoprene primary material
- Stainless steel belt clip
- Zinc-plated cast D-ring
- Adjustable buckle closure for security
- Fits standard 0.5L water bottles
- Maximum tethering capacity of 2lbs. (0.9kg)



Part No.	Description	UOM
19775	Water Bottle / Canister Sleeve   Black   0.9kg	6 Units



# SQUIDS

## TOOL TRAPS

**ATTACHMENT SERIES (INSTRUMENTS ETC.)**





## WIRE LOOP TOOL TAILS



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- Orange PU coating for protection
- Designed to safely tether small captive holes on tools
- Extended length – 6in. (15cm)
- Copper termination ends
- One-step retrofit attachment point
- Maximum tethering capacity of 2lbs. (0.9kg)

**3704**



Part No.	Description	UOM
19707	Loop Tool Tail   0.9kg   6-pack	6 Units

## WIRE SCREWGATE TOOL TAILS



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- Stainless-steel cable wire is corrosion resistant
- Orange PU coating for protection
- Copper termination ends
- Designed to safely tether small captive holes on tools
- Extended length – 6in. (15cm)
- Maximum tethering capacity of 3lbs. (1.4kg)

**3705**



Part No.	Description	UOM
19709	Screw Gate Tool Tail   1.4kg   6-pack	6 Units





# SQUIDS TOOL TRAPS

## ATTACHMENT SERIES (POWER TOOLS)

### PATENTED DESIGNS

ALLOW USER TO INSTALL ATTACHMENTS ON POWER TOOLS WITHOUT CHANGING THE TOOL'S INTEGRITY



**MULTIPLE STYLES**  
FOR A VARIETY OF POWER TOOLS

**STAINLESS STEEL  
HARDWARE**  
RESISTANT TO THE  
ELEMENTS ON THE JOB



**3796 POWER TOOL TRAP™**  
Drill/Impact Driver Bracket



**3797 POWER TOOL TRAP™**  
Grinder Bracket



**3798 POWER TOOL TRAP™**  
Pneumatic Bracket





## POWER TOOL TRAP - DRILL/IMPACT DRIVER BRACKET



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- For installation on drills/drivers to create a tether point
- Stainless steel bracket and fasteners for application
- Versatile design attaches to a variety of tools
- Set comes with bracket, 7 fasteners & washers and two labels
- Max capacity is 2.5lbs (1.13kg) with M2.5 fastener and 3lbs (1.36kg) with M3 and M4 fastener
- Fits M2.5, M3.0, M4.0 screw ports on tools

3796



Part No.	Description	UOM
19796	Drill Bracket   Stainless Steel	6 Units

## POWER TOOL TRAP - GRINDER BRACKET



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- For installation on grinders to create a tether point
- Stainless steel bracket and fasteners for application
- Versatile design attaches to a variety of grinders
- Set comes with bracket, 2 fasteners & washers and label
- Max capacity is 8lbs (3.63kg)
- Fits M8 and M10 screw ports on tools

3797



Part No.	Description	UOM
19797	Grinder Bracket   Stainless Steel	6 Units

## POWER TOOL TRAP - PNEUMATIC BRACKET



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- For installation on grinders to create a tether point
- Stainless steel bracket attaches to hose coupler
- Design allows attachment to swivel when tethered
- Set comes with bracket and a label
- Max capacity is 5lbs (2.26kg)
- Fits 3/8" and 1/4" couplers

3798



Part No.	Description	UOM
19798	Pneumatic Bracket   Stainless Steel	6 Units

## POWER TOOL TRAP - BATTERY WRAP



### KIT INCLUDES:

- Approved to the ANSI/ISEA 121-2018 standard
- 1000D nylon with water-resistant backing
- Hook & loop straps secure power tool battery
- Nickel-plated cast D-ring
- Prevents power tool and battery from becoming a dropped object
- Large size to fit batteries up to L:12.5cm x W:9cm x H:9cm
- Small size to fit batteries up to L:9cm x W:7cm x H:6.5cm
- Third-party tested using a 2:1 safety factor

3780



Part No.	Description	UOM
19784	Battery Wrap   Black   L   4.5kg	6 Units
19782	Battery Wrap   Black   S   2.7kg	6 Units



# SQUIDS

## TOOL TETHERING

### LANYARD SERIES (TOOL & EQUIPMENT)

#### SHOCK-ABSORBING PROPERTIES

#### DURABLE LANYARD BODY

3100F(X)

capacity 10 LBS / 4.5 KG  
squids® MODEL #3100F(X)

3704

#### CAPTIVE EYE CARABINERS

#### CARABINER VARIETY AND SECURITY

#### THIRD-PARTY CERTIFIED WEIGHT RATINGS





## TOOL LANYARD SINGLE CARABINER



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1680D shock-absorbing poly webbing
- Aluminium alloy carabiner with locking screw-gate and captive eye
- Threaded loop end that grips the tool when attached
- Low-profile lightweight design reduces snag hazards
- Third-party tested using a 2:1 safety factor
- Lanyard size: 96cm - 122cm

**3100F(X)**



Part No.	Description	UOM
19802	Lanyard   Orange/Grey	6 Units

## TOOL LANYARD DUAL CARABINER



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1680D shock-absorbing poly webbing
- Aluminium alloy carabiner with locking screw-gate and captive eye
- Carabiners designed for gloved hands
- Low-profile lightweight design reduces snag hazards
- Third-party tested using a 2:1 safety factor
- Lanyard size: 96cm - 122cm

**3110F(X)**



Part No.	Description	UOM
19822	Lanyard   Orange/Grey	6 Units

## TOOL LANYARD SINGLE-LOCKING CARABINER



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1680D shock-absorbing poly webbing
- Double-action aluminium carabiner with captive eye
- Treaded loop end that grips the tool when attached
- Low-profile lightweight design reduces snag hazards
- Third-party tested using a 2:1 safety factor
- Lanyard size: 96cm - 123cm

**3108F(X)**



Part No.	Description	UOM
19808	Lanyard   Orange/Grey	6 Units

## TOOL LANYARD DUAL-LOCKING CARABINER



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1680D shock-absorbing poly webbing
- Double-action aluminium carabiner with captive eye
- Carabiners designed for gloved hands
- Low-profile lightweight design reduces snag hazards
- Third-party tested using a 2:1 safety factor
- Lanyard size: 96cm - 123cm

**3118F(X)**



Part No.	Description	UOM
19828	Lanyard   Orange/Grey	6 Units

# SQUIDS

## TOOL TETHERING

### LANYARD SERIES (TOOL & EQUIPMENT)

#### TOOL LANYARD SINGLE SWIVELLING LOCKING CARABINER



##### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1680D shock-absorbing poly webbing
- Double-action aluminium carabiner with captive eye
- Treaded loop end grips the tool when attached
- Lightweight design reduces snag hazards
- Swivelling carabiners eliminate binding and snags
- Third party certified to a 11.3kg maximum capacity with 2:1 safety factor
- Lanyard size: 96cm - 122cm

3109F(X)



Part No.	Description	UOM
19809	Lanyard   Orange/Grey	6 Units

#### TOOL LANYARD DUAL SWIVELLING LOCKING CARABINER



##### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1680D shock-absorbing poly webbing
- Double-action aluminium carabiner with captive eye
- Carabiners designed for gloved hands
- Lightweight design reduces snag hazards
- Swivelling carabiners eliminate binding and snags
- Third party certified to a 11.3kg maximum capacity with 2:1 safety factor
- Lanyard size: 96cm - 122cm

3119F(X)



Part No.	Description	UOM
19829	Lanyard   Orange/Grey	6 Units

#### SS SCREWGATE CARABINER LANYARD



##### KEY FEATURES:

- Energy-absorbing cord with tubular-nylon webbing
- Manual-locking stainless steel carabiners (#304)
- Reflective accent for higher visibility
- Lock stitching at both ends for extra security
- Third-party tested using a 2:1 safety factor
- Standard lanyard size: 89cm - 110cm
- Extended lanyard size: 110cm - 140cm

3111



Part No.	Description	UOM
19027	Standard Lanyard   HV Lime	6 Units
19037	Extended Lanyard   HV Lime	6 Units

#### SS SCREWGATE TRIPLE CARABINER - TWINLEG



##### KEY FEATURES:

- Energy-absorbing cord with tubular-nylon webbing
- Manual-locking stainless steel carabiners (#304)
- Twin leg for two tools or 100% tie-off of one tool
- Reflective accent for higher visibility
- Lock stitching at both ends for extra security
- Third-party tested using a 2:1 safety factor
- Standard lanyard size: 89cm - 107cm

3311



Part No.	Description	UOM
19083	Standard Lanyard   HV Lime	6 Units



## WRIST TOOL LANYARD



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Polyester webbing cuff secures to wrist
- Energy-absorbing ribbed pull cord
- Adjustable barrel lock for tool attachment
- Short length improves the drop clearance needed
- Wrist Measurement: S/M 5" – 7" (13cm – 18cm)
- Wrist Measurement: L/XL 7" – 8½" (18cm – 22cm)

**3115**



Part No.	Description	UOM
19042	Wrist Lanyard S/M	6 Units
19052	Wrist Lanyard L/XL	6 Units

## PULL-ON WRIST TOOL LANYARD - CARABINER



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Elastic maintains snug fit
- Pull-on design provides easy on/off
- One-size-fits-all
- Stainless steel (#304) carabiner
- Tuck-away pocket to keep connector when not in use

**3114**



Part No.	Description	UOM
19056	Wrist Lanyard   Black	6 Units

### PRYME TIP:

Not all tool lanyards are created equal.

Always select a Shock Absorbing SQUIDST<sup>™</sup> F(x) Tool Lanyard.

SQUIDST<sup>™</sup> F(x) Tool Lanyards feature shock absorbing poly webbing that limit the drop forces on workers at heights.

These next generation SQUIDST<sup>™</sup> F(x) Tool Lanyards increase both the safety and efficiency of workers at heights.

## TOOL LANYARD SINGLE CARABINER - MODULAR




### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1680D shock-absorbing poly webbing
- Aluminium alloy carabiner with locking screw-gate and captive eye
- Threaded loop end grips the tool when attached
- Lightweight design reduces snag hazards
- Modular buckle for quickly exchanging tools
- Third-party tested using a 2:1 safety factor
- Lanyard size: 96cm - 122cm

**3102F(X)**



Part No.	Description	UOM
19864	Lanyard   Orange/Grey	6 Units



# SQUIDS

## TOOL TETHERING

### LANYARD SERIES (TOOL & EQUIPMENT)

## SQUIDS<sup>®</sup> NEXT GENERATION SHOCK ABSORBING LANYARDS

Ergodyne Squids<sup>®</sup> Tool Lanyards are scientifically engineered to reduce drop forces and prevent workers from being pulled down when they drop an object. The other guys? Not so much.





## TOOL LANYARD DUAL CARABINER



### KEY FEATURES:

- Energy-absorbing cord with tubular-nylon webbing
- Single-action aluminium carabiner
- Reflective accent for higher visibility
- Lock stitching at both ends for extra security
- Third-party tested using a 2:1 safety factor
- Standard lanyard size: 89cm - 107cm
- Extended lanyard size: 107cm - 137cm

**3110**



Part No.	Description	UOM
19022	Standard Lanyard   Black	6 Units
19032	Extended Lanyard   Black	6 Units
19023	Standard Lanyard   HV Lime	6 Units
19033	Extended Lanyard   HV Lime	6 Units

## SS SCREWGATE CARABINER LANYARD



### KEY FEATURES:

- Energy-absorbing cord with tubular-nylon webbing
- Manual-locking stainless steel carabiners (#304)
- Reflective accent for higher visibility
- Lock stitching at both ends for extra security
- Third-party tested using a 2:1 safety factor
- Standard lanyard size: 89cm - 107cm
- Extended lanyard size: 107cm - 137cm

**3101**



Part No.	Description	UOM
19007	Standard Lanyard   HV Lime	6 Units
19017	Extended Lanyard   HV Lime	6 Units

## COIL TOOL LANYARD



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Constructed with PU-covered aircraft cable
- Stainless steel carabiners (#304)
- Coil design prevents snag and tangle hazards
- Swivelling design prevents tangles and fast recoil
- Extended length 48" (123cm)

**3130S**



Part No.	Description	UOM
19130	Coil Lanyard   S	6 Units

## COIL TOOL LANYARD



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Constructed with PU-covered aircraft cable
- Stainless steel carabiners (#304)
- Coil design prevents snag and tangle hazards
- Swivelling design prevents tangles and fast recoil
- Extended length 48" (123cm)

**3130M**



Part No.	Description	UOM
19131	Coil Lanyard   M	6 Units

# SQUIDS

## TOOL TETHERING

### LANYARD SERIES (TOOL & EQUIPMENT)

#### HD LANYARD SINGLE CARABINER



##### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1000D poly webbing
- Double-action aluminium carabiner with captive eye
- Treaded loop end grips the tool when attached
- Swivelling carabiners eliminate binding and snags
- Heavy-duty design tethers tools up to 40lbs (18kg)
- Third-party tested using a 2:1 safety factor
- Lanyard size: 193cm

**3129**



Part No.	Description	UOM
19137	Lanyard   Black	6 Units

#### HD LANYARD DUAL CARABINER



##### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable 1000D poly webbing
- Double-action aluminium carabiner with captive eye
- Carabiners designed for gloved hands
- Swivelling carabiners eliminate binding and snags
- Heavy-duty design tethers tools up to 40lbs (18kg)
- Third-party tested using a 2:1 safety factor
- Lanyard size: 193cm

**3139**



Part No.	Description	UOM
19139	Lanyard   Black	6 Units

#### COIL LOW PROFILE LANYARD - CARABINER



##### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Low-profile, durable plastic coil
- Easily attaches to hard hats and other small tools
- Coil design prevents snag and tangle hazards
- Aluminium alloy carabiner with captive eye
- Lanyard size: 30.5cm - 123cm

**3156**



Part No.	Description	UOM
19161	LP Lanyard   Grey	6 Units

#### COIL LOW PROFILE LANYARD - DUAL CARABINER



##### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Low-profile, durable plastic coil
- Easily attaches to hard hats and other small tools
- Coil design prevents snag and tangle hazards
- Aluminium alloy carabiner with captive eye
- Lanyard size: 30.5cm - 123cm

**3166**



Part No.	Description	UOM
19162	Lanyard   Grey	6 Units









# SQUIDS

## TOOL TETHERING

### LANYARD SERIES (HARD HATS)

#### PRYME TIP:

Chin straps are a very uncomfortable way to secure a hard hat – workers prefer SQUIDS™ hard hat lanyards



**EASILY ATTACHES**  
TO HARD HATS AND OTHER HEAD  
WEAR

3155

**COMFORTABLE**  
HIGH-STRETCH ELASTIC MATERIAL

**QUICK-CONNECT CLAMP**  
ATTACHES SECURELY TO FABRIC

THIRD PARTY  
TESTED



## ELASTIC LOW PROFILE LANYARD - CLAMP



### KEY FEATURES:

- Comfortable, high-stretch elastic material
- Easily attaches to hard hats and other head wear
- Quick-connect clamp attaches securely to fabric
- Lanyard size: 58cm - 123cm

**3155**



Part No.	Description	UOM
19155	LP Lanyard   HV Lime	24 Units

## ELASTIC LOW PROFILE LANYARD - BUCKLE



### KEY FEATURES:

- Comfortable, high-stretch elastic material
- Easily attaches to hard hats and other head wear
- Double-lock plastic buckle attaches to harness
- Lanyard size: 55cm - 123cm

**3150**



Part No.	Description	UOM
19150	LP Lanyard   HV Lime	6 Units

## COIL LOW PROFILE LANYARD - CLAMP



### KEY FEATURES:

- Low-profile, durable plastic coil
- Easily attaches to hard hats and other small tools
- Coil design prevents snag and tangle hazards
- Quick-connect clamp attaches securely to fabric
- Lanyard size: 30.5cm - 123cm

**3158**



Part No.	Description	UOM
19159	LP Lanyard   HV Lime	6 Units

## COIL LOW PROFILE LANYARD - CARABINER



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Low-profile, durable plastic coil
- Easily attaches to hard hats and other small tools
- Coil design prevents snag and tangle hazards
- Aluminium alloy carabiner with captive eye
- Lanyard size: 30.5cm - 123cm

**3156**



Part No.	Description	UOM
19161	LP Lanyard   Grey	6 Units



## RETRACTOR SERIES (TOOL & EQUIPMENT)

## LOCKING CARABINERS

**THAT SWIVEL FOR SECURE ATTACHMENT  
AND SMOOTH FUNCTION**

## MULTIPLE WAYS

**TO ANCHOR RETRACTABLES  
INCLUDING CARABINERS AND  
WEB SLOTS**



## DURABLE

## HOUSINGS PROTECT THE INTERNAL WORKS OF THE RETRACTABLE

## LIGHTWEIGHT AND CUT RESISTANT

## CORDS HOLD UP IN TOUGH ENVIRONMENTS



## ELASTIC LOW PROFILE LANYARD - CLAMP



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Self-setting pawls set desired lanyard length
- Modular connecting buckle for exchanging tools
- Plated swivelling ring for 360° rotation
- Loop and manual-locking stainless carabiner (#304)
- Technora cord for ultimate strength and durability
- Extendable length up to 48in (123cm)

**3000 / 01**



MAX LOAD LIMIT **0.9kg**

MAX LOAD LIMIT **0.5kg**

Part No.	Description	UOM
19300	Retractable Lanyard Dual Carabiner   0.5kg	6 Units
19301	Retractable Lanyard Single Carabiner and Loop   0.9kg	6 Units

## RETRACTABLE TOOL LANYARD - LOOP



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable ABS plastic housing for extreme durability
- Double-locking carabiner for secure attachment
- Web slot to be threaded on a belt for anchoring
- Lightweight cord is durable and cut resistant
- Extendable length up to 48in (123cm)

**3010**



MAX LOAD LIMIT **2.3kg**

Part No.	Description	UOM
19310	Retractable Lanyard Single Carabiner   2.3kg	6 Units

## RETRACTABLE TOOL LANYARD - DUAL CARABINER



### KEY FEATURES:

- Approved to the ANSI/ISEA 121-2018 standard
- Durable ABS plastic housing for extreme durability
- Dual double-locking carabiners for secure attachment
- Built-in swivel to prevent tangles and binds
- Lightweight cord is durable and cut resistant
- Extendable length up to 48in (123cm)


**3011**



MAX LOAD LIMIT **3.6kg**

Part No.	Description	UOM
19311	Retractable Lanyard Dual Carabiner   3.6kg	1 Unit

## RETRACTABLE TOOL TAILS™

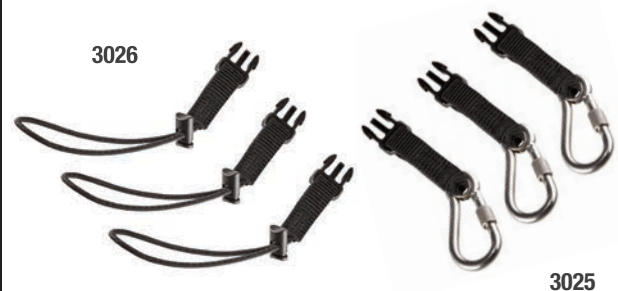

### KEY FEATURES:

- Compatible with 3000/3001 Retractable Lanyard
- Modular connecting buckle for exchanging tools
- 3025: Manual-locking stainless steel carabiner (#304)
- 3026: Loop for tool attachment


**3025 / 26**



MAX LOAD LIMIT **0.9kg**

MAX LOAD LIMIT **0.5kg**

Part No.	Description	UOM
19325	Extra Tails with Carabiner   0.5kg	6 Units
19326	Extra Tails with Loop   0.9kg	6 Units



# SQUIDS

## GRABBER & TIE HOOK



### GRABBER COLOURS:



Deep Blue  
Metal Detectable



Red



Orange



Yellow



Black



Blue

### GRABBER - DUAL CLIP OR BELT CLIP MOUNT



#### KEY FEATURES:

- Clips to clothing, belts, webbing and D-rings
- Holds PPE, tools, accessories, and other items
- Prevents dropped objects and foreign material
- Dielectric / non-conductive material
- Durable, ultra-resilient acetal copolymer
- 100 Packs available for better pricing on 3400 dual clip mounts

3400 / 05

### TIE HOOK - LOCKING HOOK



#### KEY FEATURES:

- Large locking hook with 360° swivel (38mm)
- Reusable sliding belt lock mechanism
- High tensile strength, weather resistant nylon 66
- Hi-vis orange colour
- Excellent resistance to oil, salt, solvents, and alkali
- Temp range: -40°C - 80°C
- Recommended load limit: 44lbs (19.9kg)

3540



Part No.	Description	UOM
33402	Small: 30cm   19.9kg	6 Units
33403	Locking hook   M   40cm   19.9kg	6 Units
33404	Large: 50cm   19.9kg	6 Units

Part No.	Description	Part No. 100 Pack #	UOM
3400   Dual clip mount			
19112	Dual Clip   Black	19112-Bulk	6 Units
19113	Dual Clip   Red	19113-Bulk	6 Units
19117	Dual Clip   Blue	19117-Bulk	6 Units
19118	Dual Clip   Orange	19118-Bulk	6 Units
19119	Dual Clip   Lime	19119-Bulk	6 Units
19132	Metal Detectable   Deep Blue		6 Units
3405   belt Clip mount			
19122	Belt Clip   Black		6 Units
19123	Belt Clip   Red		6 Units
19127	Belt Clip   Blue		6 Units
19128	Belt Clip   Orange		6 Units
19129	Belt Clip   Lime		6 Units
19142	Metal Detectable   Deep Blue		6 Units



## 5-INCH PADDED AERIAL TOOL BELT




### KEY FEATURES:

- 1680D ballistic polyester
- Thick, vented foam padding for comfort
- Nickel-plated 2" double tongue metal roller buckle
- Nickel-plated grommets set firmly for durability
- Nickel-plated suspender anchors

5555

Part No.	Description	UOM
13656	5-Inch Belt   Black   M	1 Unit
13657	5-Inch Belt   Black   L	1 Unit
13658	5-Inch Belt   Black   XL	1 Unit
13659	5-Inch Belt   Black   2XL	1 Unit

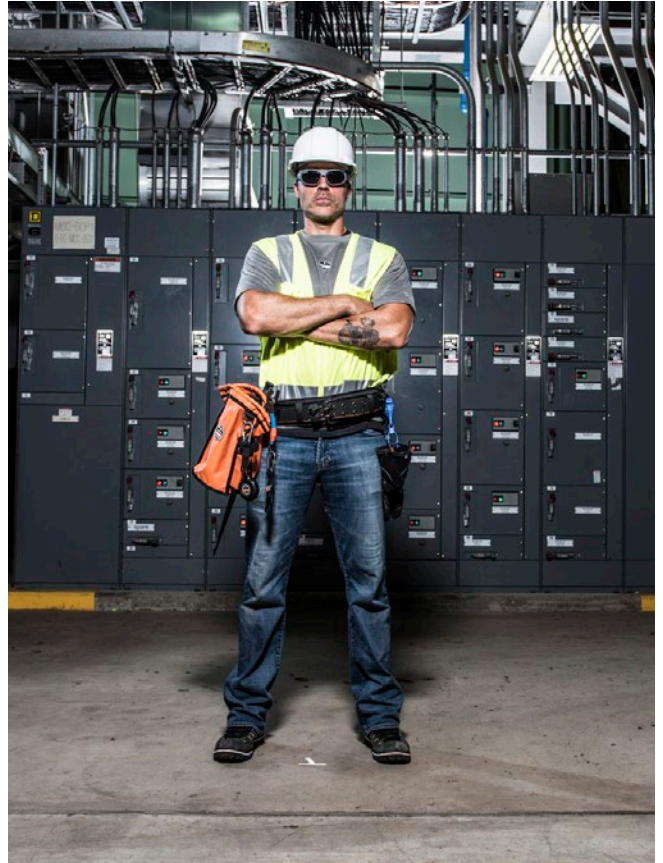

**COMFORTABLE, PADDED  
TOOL BELT FOR EASY  
RIG SUPPORT**



# ARSENAL

## TOOL TOPPING

### HOIST BUCKET SERIES

#### THIRD-PARTY CERTIFIED

TO A 5:1 SAFETY FACTOR

#### HEAVY-GAUGE STITCHING

#### PATENTED

SAFETY TOP

#### DURABLE FABRICS

#### REINFORCED BOTTOM





## CANVAS HOIST BUCKET WITH D-RINGS



### KEY FEATURES:

- 24oz canvas and synthetic leather bottom
- Reinforced webbing handle
- Three plated D-rings
- Third-party certified to a 5:1 safety factor
- Maximum safe working capacity of 68KG
- Maximum safe tethering anchor capacity of 9kg on each d-ring
- Diameter: 32cm / Height: 43cm

**5960**



Part No.	Description	UOM
14960	Hoist Bucket without Top	1 Unit
14938	Top of Bucket	1 Unit

## LEATHER BOTTOM CANVAS



### KEY FEATURES:

- 20oz canvas and leather-reinforced base
- Nickel-plated swivel clip
- PP rope handle and interior pocket
- Third-party certified to a 4:1 safety factor
- Maximum safe working capacity of 68KG
- Diameter: 32cm / Height: 43cm

**5740**



Part No.	Description	UOM
14440	Hoist Bucket without Top	1 Unit
14438	Top of Bucket	1 Unit

### PRYME TIP:

Always use the patented safety top when lifting with Hoist Buckets



# ARSENAL

## GEAR & TOOL STORAGE

### BAG & ORGANISER SERIES



**D-RINGS**  
FOR ATTACHMENT  
OF TOOL LANYARDS

5843

**DURABLE  
FABRICS**

**HEAVY-DUTY  
ZIPPERS**

**VARIETY OF  
POCKETS**





## TOPPED PARTS POUCH



### KEY FEATURES:

- 20oz water-resistant canvas
- Trap door closure for safety and security
- Two exterior tool loops
- Two exterior D-rings for tool lanyard attachment
- Third-party certified to a 4:1 safety factor
- Size: 19cm x 19cm x 30cm

**5528**



MAX LOAD LIMIT 9kg

Part No.	Description	UOM
13628	5528   Parts Pouch   Black   9kg	1 Unit

## TOPPED PARTS POUCH



### KEY FEATURES:

- Waterproof tarpaulin material
- Trap door closure for safety and security
- Two exterior tool loops
- Two exterior D-rings for tool lanyard attachment
- Third-party certified to a 4:1 safety factor
- Size: 19cm x 19cm x 30cm

**5538**



MAX LOAD LIMIT 9kg

Part No.	Description	UOM
13638	5538   Parts Pouch   Orange   9kg	1 Unit

## PREMIUM TOPPED PARTS POUCH



### KEY FEATURES:

- 1680D ballistic polyester
- Snap-hinge closure for safety and security
- Two exterior D-rings for tool lanyard attachment
- Straps designed for quick attachment and removal
- Size: 25cm x 15cm x 29cm

**5527**



MAX LOAD LIMIT 9kg

Part No.	Description	UOM
13627	5527   Parts Pouch   Orange   9kg	1 Unit

## TOOL BACKPACK



### KEY FEATURES:

- Tall tool holster on side panel
- Padded shoulder straps for increased comfort
- Reinforced comfort padding on the back
- 26 interior pockets and 7 exterior pockets
- Size: 34cm x 22cm x 61cm

**5843**



MAX LOAD LIMIT 22.6kg

Part No.	Description	UOM
13743	5843   Parts Pouch   Black   23kg	1 Unit



# EQUIPMENT TRANSPORT 101

## THE DO'S AND DON'TS OF DROPS

### RISKS

#### ASSOCIATED WITH POOR EQUIPMENT TRANSPORTATION

##### SPRAINS OR STRAINS

Many times, workers try to carry all their tools and equipment to heights in case they need something they don't anticipate. This can lead to them overloading themselves while climbing, taking a toll on the body.

##### FATIGUE / EXHAUSTION

That toll may not lead to a muscle pull or strain, however trying to carry too much up during a long climb on a hot day could stress the body in other ways. Stress or exertion – coupled with extreme conditions like heat – can be dangerous.

##### FALLING OBJECT / STRUCK-BY


Improperly carrying equipment to heights like holding tools in your hands, slipping them into your pocket or not securing them when hoisting can easily lead to those objects taking a tumble below.

##### FALLS TO LOWER LEVEL

Too much weight on a worker can drag them down, not having a lifting plan in place for hoisting can swing a load into someone, or not storing equipment in an organized fashion while at height can lead to trip hazards all causing a potential slip, trip or fall.

## CERTIFIED EQUIPMENT

**THERE ARE HUNDREDS OF BAGS, BUCKETS, POUCHES AND HOLSTERS OUT THERE, BUT YOUR STANDARD 19L BUCKET IS NOT GOING TO BE ENOUGH AT HEIGHTS. PORTABLE CONTAINERS THAT ARE HOISTED AND STATIONARY CONTAINERS THAT ARE CARRIED SHOULD BE RATED.**

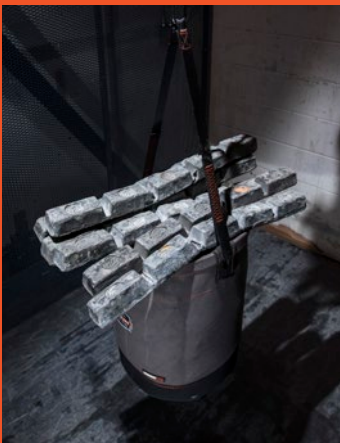


##### STATIC TESTING

Portable and stationary containers should be statically pulled or loaded with a 5:1 safety factor.



##### INVERTED STATIC TESTING

Containers designed to carry contents that cannot be tethered should have a top or closure that is tested upside down to a 2:1 safety factor.

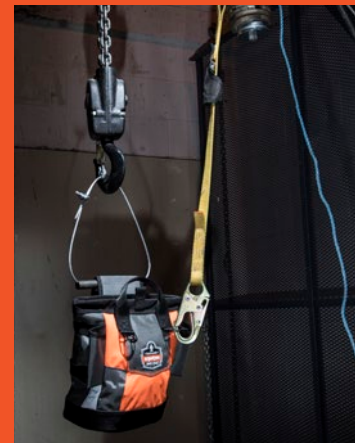

##### DYNAMIC TESTING

Containers should have drop testing conducted, as well including attachment points meant to anchor lanyards.



## BEST PRACTICES

- **EQUIPMENT TRANSPORTATION BEST PRACTICES TO MITIGATE THOSE RISKS.**
- **NEVER CARRY OBJECTS IN YOUR POCKETS**
- **ALWAYS MAINTAIN THREE POINTS OF CONTACT** (Never Carry a Container in your Hand)
- **LIMIT THE WEIGHT ON A WORKER'S BODY** (Hoist, if possible)
- **USE CONTAINERS WITH SECURE TOPS AND/OR TETHERING ANCHOR POINTS**
- **USE MECHANICAL ADVANTAGE TO HOIST, IF POSSIBLE**
- **HAVE A LIFT PLAN IN PLACE - EVEN THOUGH A CRANE IS BEING USED**







# EQUIPMENT GUIDE

## LANYARD AND SHACKLE GUIDE

Follow the tool lanyard selection guide to choose the right lanyard for the job.


Model	CAPACITY	LANYARD			CONNECTORS				
	KGs	Style	Modular	Single/Twin Leg	Connector A		Connector B		Swivel
					Material	Connection	Material	Connection	
3000	0.5	Retractable	Yes	Single	Stainless	Manual Lock	Stainless	Manual Lock	Yes
3001	0.9	Retractable	Yes	Single	Stainless	Manual Lock	Loop	Choke	Yes
3010	2.3	Retractable	No	Single	Aluminium	Auto Locking	ABS Plastic	Belt Loop	Yes
3011	3.6	Retractable	No	Single	Aluminium	Auto Locking	Aluminium	Auto Locking	Yes
3100	4.6	Shock Absorbing Elastic	No	Single	Aluminium	Non Locking	Loop	Choke	No
3110	4.6	Shock Absorbing Elastic	No	Single	Aluminium	Non Locking	Aluminium	Non Locking	No
3111	6.8	Shock Absorbing Elastic	No	Single	Stainless	Manual Lock	Stainless	Manual Lock	No
3100F(x)	4.5	Shock Absorbing Elastic	No	Single	Aluminium	Manual Locking	Polyester	Loop	No
3110F(x)	4.5	Shock Absorbing Elastic	No	Single	Aluminium	Manual Locking	Aluminium	Manual Locking	No
3102F(x)	2.3	Shock Absorbing Elastic	Yes	Single	Aluminium	Manual Locking	Polyester	Loop	No
3108F(x)	6.8	Shock Absorbing Elastic	No	Single	Aluminium	Auto Locking	Polyester	Loop	No
3109F(x)	12	Shock Absorbing Elastic	No	Single	Aluminium	Auto Locking	Polyester	Loop	Yes
3118F(x)	6.8	Shock Absorbing Elastic	No	Single	Aluminium	Auto Locking	Aluminium	Auto Locking	No
3119F(x)	12	Shock Absorbing Elastic	No	Single	Aluminium	Auto Locking	Aluminium	Auto Locking	Yes
3129	18	Heavy Duty	No	Single	Aluminium	Auto Locking	Aluminium	Auto Locking	Yes
3139	18	Heavy Duty	No	Single	Aluminium	Auto Locking	Aluminium	Auto Locking	Yes
3130S	0.9	Coiled Cable	No	Single	Stainless	Manual Lock	Stainless	Manual Lock	No
3130M	2.3	Coiled Cable	No	Single	Stainless	Manual Lock	Stainless	Manual Lock	No
3311	6.8	Shock Absorbing Elastic	No	Twin	Stainless	Manual Lock	Stainless	Manual Lock	No
3114	1.4	Wrist	Yes	Single	Nylon Strap	Wrist Cuff	Stainless	Manual Lock	Yes
3115	0.9	Wrist	No	Single	Nylon Strap	Wrist Cuff	Loop	Choke	Yes
3116	1.4	Wrist	Yes	Single	Elastic	Loop	Elastic	Wrist Cuff	Yes
3150	0.9	Speciality	No	Single	Polyester	Loop	Polypropylene	Buckle	No
3155	0.9	Speciality	No	Single	Polyester	Loop	Polypropylene	Clamp	No
3156	0.9	Specialty	No	Single	Aluminium	Auto Locking	PU	Loop	No
3157	0.9	Specialty	Yes	Single	Plastic	Modular Buckle	Polypropylene	Clamp	No
3158	0.9	Speciality	No	Single	Plastic	Loop	Polypropylene	Clamp	No
3166	0.9	Specialty	No	Single	Aluminium	Auto Locking	Aluminium	Auto Locking	No



# SQUIDS TOOL SHACKLES SELECTION GUIDE

Follow the tool shackles selection guide to choose the right shackles for the job. Waisted tools or captive tools with connection points that are too small for carabiners, can use tool shackles to create a connection point.

TOOL WEIGHT	TAIL MODEL #	TRAP MODEL (TYPE: MODEL)				
		SHAFT DIAMETER: < 19 MM	SHAFT DIAMETER: 19-32 MM	SHAFT DIAMETER: 32-44 MM	SHAFT DIAMETER: 44-57 MM	SHAFT DIAMETER: 57-63 MM
WEIGHT < 0.90KG	WEB TAIL: 3700 (ALL SIZES)	Tape: 3750 [Length = > 31cm]	Tape: 3750 [Length = > 31cm]	Tape: 3750 [Length = > 46cm]	Tape: 3750 [Length = > 46cm]	Tape: 3750 [Length = > 61cm]
		Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: N/A
	ELASTIC TAIL: 3703, 3703EXT, 3713	Tape: 3750 [Length = > 31cm]	Tape: 3750 [Length = > 31cm]	Tape: 3750 [Length = > 46cm]	Tape: 3750 [Length = > 46cm]	Tape: 3750 [Length = > 61cm]
		Cold Shrink: N/A	Cold Shrink: 3723	Cold Shrink: 3723	Cold Shrink: 3726	Cold Shrink: 3726
WEIGHT < 2.26KG	ELASTIC TAIL: 3703, 3703EXT, 3713	Tape: 3750 [Length = > 46cm]	Tape: 3750 [Length = > 46cm]	Tape: 3750 [Length = > 61cm]	Tape: 3750 [Length = > 61cm]	Tape: 3750 [Length = > 76cm]
		Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: 3724	Cold Shrink: 3726	Cold Shrink: 3726
WEIGHT < 4.53KG	ELASTIC TAIL: 3703, 3703EXT, 3713	Tape: 3750 [Length = > 61cm]	Tape: 3750 [Length = > 61cm]	Tape: 3750 [Length = > 76cm]	Tape: 3750 [Length = > 76cm]	Tape: 3750 [Length = > 92cm]
		Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: 3724	Cold Shrink: 3726	Cold Shrink: 3726
WEIGHT < 6.80KG	ELASTIC TAIL: 3703EXT	Tape: 3750 [Length = > 76cm]	Tape: 3750 [Length = > 76cm]	Tape: 3750 [Length = > 92cm]	Tape: 3750 [Length = > 92cm]	Tape: 3750 [Length = > 122cm]
		Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: N/A	Cold Shrink: 3726

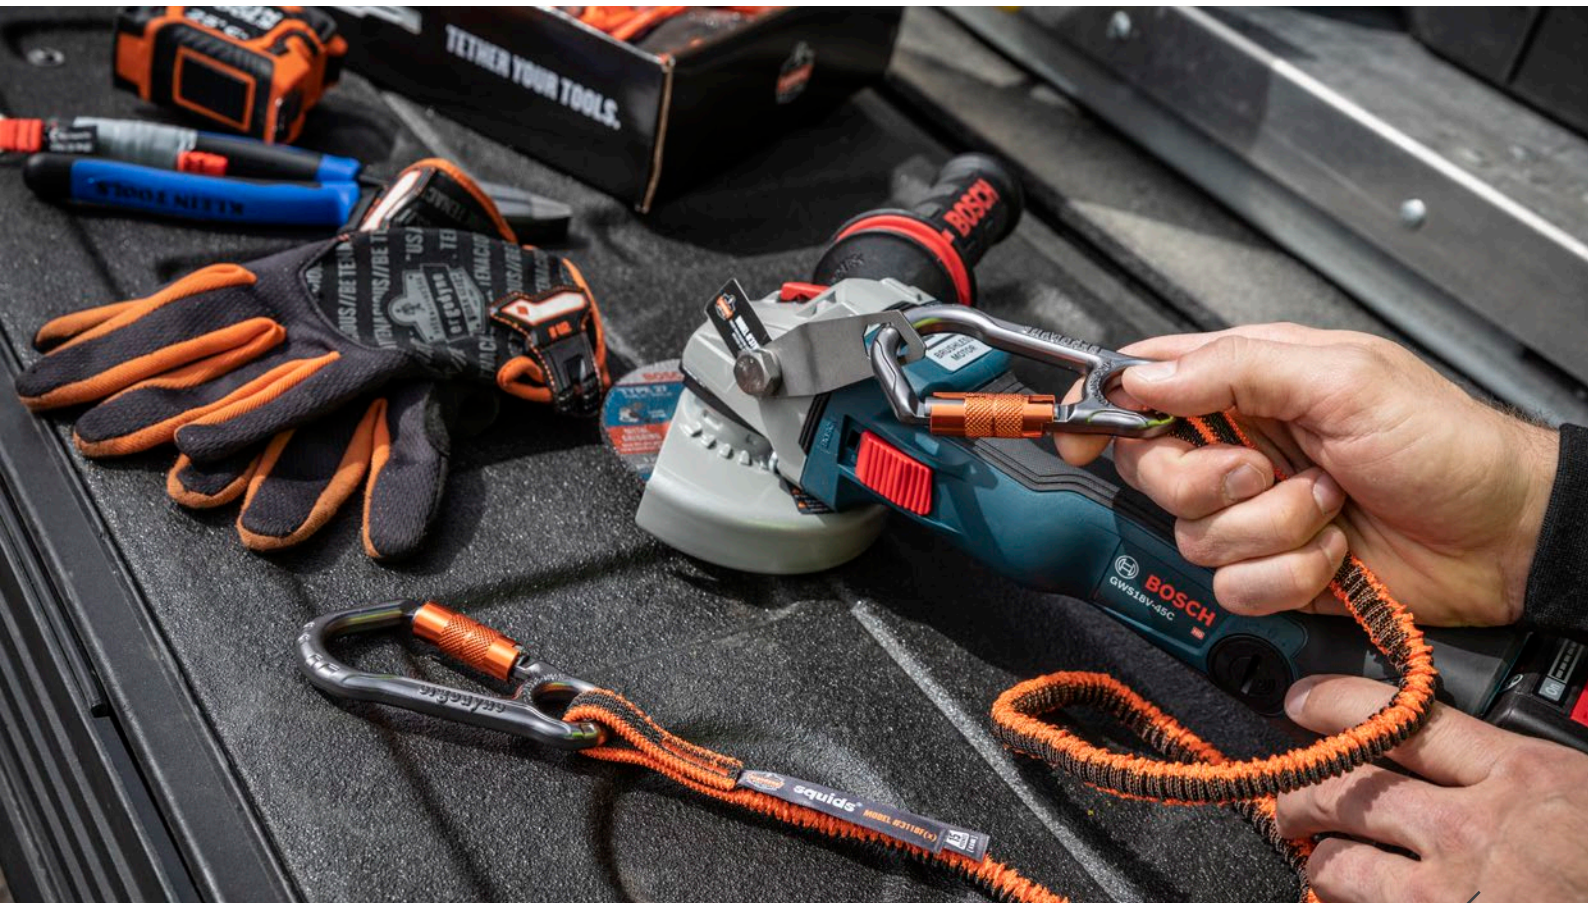





# PROFLEX

## ANTI-VIBRATION GLOVES

### PROTECTION ARMOUR

### CERTIFIED VIBRATION REDUCTION

AVC™ (ADVANCED VIBRATION  
CONTROL) PADDED PALM

HAND-ARM  
VIBRATION (HAVS)  
AKA “WHITE FINGER”  
IS A PERMANENT  
MEDICAL CONDITION  
THAT CAUSES LOSS OF  
FEELING IN FINGERS,  
HANDS AND ARMS.  
EXTREME CASES  
CAN RESULT IN  
LOSS OF PARTS OR  
COMPLETE DIGITS.

#### PRYME TIP:

Always use a Vibration Reducing  
Glove when working with power  
tools and machinery



9015F(x)

### MOULDED HOOK & LOOP CLOSURE CINCHES TIGHT



## ANSI/ISO-CERTIFIED LIGHTWEIGHT ANTI-VIBRATION



### KEY FEATURES:

- ANSI S2.73-2014/ISO 10819:2013 certified protection
- Unique chloroprene rubber palm pad
- Breathable 7-gauge cotton/nylon seamless knit
- Comfortable, flexible pre-curved design
- Elastic cuff for secure fit

**9000**



Part No.	Description	UOM
16453	Black   M	6 Pairs
16454	Black   L	6 Pairs
16455	Black   XL	6 Pairs

## ANSI/ISO-CERTIFIED ANTI-VIBRATION + DIR PROTECTION



### KEY FEATURES:

- ANSI S2.73-2014/ISO 10819:2013 certified protection
- Full-length AVC™ padding under gripping palm
- TPR armour on knuckles and fingers
- Hex-stretch knit + breathable spandex construction
- Low-profile moulded hook & loop closure with ID

**9015F(X)**



Part No.	Description	UOM
16232	Black   S	6 Pairs
16233	Black   M	6 Pairs
16234	Black   L	6 Pairs
16235	Black   XL	6 Pairs
16236	Black   2XL	6 Pairs



### Size Chart for Proflex Gloves

Size	Fits Hands
XS (6)	up to 7in (18cm)
S (7)	up to 7-8in (18-20cm)
M (8)	up to 8-9in (20-23cm)
L (9)	up to 9-10in (23-25cm)
XL (10)	up to 10-11in (25-28cm)
2XL (11)	up to 11-12in (28-30cm)
3XL (12)	up to 12-13in (30-32cm)



# SKULLERZ

## BUMP CAPS

Bump Caps do not provide protection against effects of falling / thrown objects or moving suspended loads and should not be used instead of an industrial safety helmet as specified in EN397 or ANSI Z89.



Innovative ventilation system and sculpted rear opening allow the shell to protect and breathe



Durable, impact-resistant ABS plastic construction outside; comfortable thermo-formed foam padding inside



Certified forehead and crown coverage means maximum protection from bumps and bangs



Unique flanged shell flexes for fit and comfort while ribs provide stability and support

### EN 812: 2012 CERTIFIED PROTECTION

EN 812 is currently the world's only standard for bump cap design and performance. Certification requires the cap and shell system undergo rigorous testing to prove protection from impact and penetration under various conditions.

Skullerz 8950, 8960, and 8945 Bump Caps provide certified protection you can count on for those tight spots on the job.



## CHOOSE THE RIGHT STYLE OF BRIM FOR YOUR WORK



Micro Brim  
-30mm



Short Brim  
-50mm



Long Brim  
-80mm



# USER INFORMATION

- BUMP CAPS ARE MADE TO ABSORB ENERGY OF A BLOW BY PARTIAL DESTRUCTION OR DAMAGE TO SHELL
- THOUGH SUCH DAMAGE MAY NOT BE READILY APPARENT, ANY BUMP CAP SUBJECTED TO SEVERE IMPACT SHOULD BE REPLACED
- FOR ADEQUATE PROTECTION, CAP MUST FIT OR BE ADJUSTED TO SIZE OF USER'S HEAD
- DO NOT APPLY PAINT, SOLVENTS, ADHESIVES OR SELF-ADHESIVE LABELS UNLESS INSTRUCTED BY THE MANUFACTURER





# SKULLERZ BUMP CAPS

**THREE DIFFERENT  
BRIM LENGTHS**

**43% LIGHTER**  
THAN THE 8950 MODEL

**WITH OR  
WITHOUT LEDS**

**EN 812-COMPLIANT  
PROTECTION**

**SHELL  
PROTECTS,  
FLEXES AND  
BREATHES**



8965

**REMOVABLE ANTI-  
MICROBIAL LINER**

**INNOVATIVE CLOSURE**  
KEEPS CAP IN PLACE





## NEXT GEN BUMP CAP



### KEY FEATURES:

- Protective shell designed for maximum comfort and airflow
- Nylon or Hi-vis polyester outer with reflective accents
- Removable and machine washable anti-microbial liner
- EN 812 Compliant patented design
- Brim sizes: Short (50mm) and Long (80mm)

**8955**



Part No.	Description	UOM
Short Brim		
23366	Black	6 Units
23336	Navy	6 Units
23351	HV Lime	6 Units
Long Brim		
23367	Black	6 Units
23337	Navy	6 Units
23352	HV Lime	6 Units

## NEXT GEN LED BUMP CAP



### KEY FEATURES:

- Protective shell designed for maximum comfort and airflow
- Patented LED lighting technology built-in under brim
- Nylon outer with reflective accents
- Removable and machine washable anti-microbial liner
- EN 812 Compliant patented design
- Brim sizes: Short (50mm) and Long (80mm)

**8965**



Part No.	Description	UOM
Short Brim		
23368	Black	6 Units
23338	Navy	6 Units
Long Brim		
23369	Black	6 Units
23339	Navy	6 Units



# SKULLERZ BUMP CAPS

**PROTECTIVE SHELL**  
FLEXES AND BREATHE

**FEATURES 40%  
MORE VENTING**

**43% LIGHTER**  
THAN THE 8950 MODEL

**CUSTOM FIT**  
HEIGHT ADJUSTMENT

8945



**YOU CAN  
LEAVE YOUR  
HAT ON!**

**UNIVERSAL BUMP CAP INSERT**  
TURNS ANY HAT INTO A PROTECTIVE CAP.



8965

+



=

**SKULLERZ™**  
HEAD PROTECTION



## UNIVERSAL BUMP CAP INSERT



### KEY FEATURES:

- Add flexible, impact-resistant insert to any cap
- Cut-away system adjusts height for custom fit
- Lightweight, breathable vented design
- Internal foam padding provides added protection
- Updated design with 40% more venting

8945



Part No.	Description	UOM
23380	Insert   Grey	6 Units

## BUMP CAP WITH LED LIGHTING TECHNOLOGY



### KEY FEATURES:

- Removable, impact-resistant shell with foam lining
- Patented flanged design for comfort and airflow
- Nylon or hi-vis polyester with reflective accents
- Updated design with 40% more venting
- EN 812 Compliant patented design
- Brim sizes: Micro (30mm), Short (50mm) and Long (80mm)

8960



Part No.	Description	UOM
Short Brim		
23370	Black	6 Units
23373	Navy	6 Units
23377	HV Lime	6 Units
Long Brim		
23374	Black	6 Units
23375	Navy	6 Units
23379	HV Lime	6 Units

## BUMP CAP / XL BUMP CAP

XL Shell Now Available!



### KEY FEATURES:

- Removable, impact-resistant shell with foam lining
- Patented flanged design for comfort and airflow
- Nylon or hi-vis polyester with reflective accents
- Updated design with 40% more venting
- EN 812 Compliant patented design
- Brim sizes: Micro (30mm), Short (50mm) and Long (80mm)

8950



Part No.	Description	UOM
Micro Brim		
23342	Black	6 Units
23341	Navy	6 Units
23331	HV Lime	6 Units
Short Brim		
23340 / 23346	Black / Black   XL	6 Units
23343 / 23347	Navy / Navy   XL	6 Units
23333	HV Lime	6 Units
Long Brim		
23344 / 23348	Black / Black   XL	6 Units
23345 / 23349	Navy / Navy   XL	6 Units
23335	HV Lime	6 Units





# ERGONOMICS

## SPRAINS AND STRAINS

**43%**

**ARE WORK  
RELATED INJURIES**

**38%**

**ARE BACK  
RELATED INJURIES**

**10%**

**ARE KNEE  
RELATED INJURIES**

**40.8% ARE BODY STRESSING INJURIES AND  
20.9% ARE DUE TO SLIPS, TRIPS AND FALLS WITHIN AUSTRALIA**

**4 OUT OF 5 PEOPLE EXPERIENCE BACK PAIN IN THEIR LIFETIME**

Work-Related sprains and strains or Musculoskeletal disorders (WMSDs) are the most common condition for which workers' compensation claims are currently lodged. Complex joints like the knees and back are an injury hotspot for workers.

### PREVENTING SPRAINS AND STRAINS

- Ergonomic solutions like using the right positioning, raising work off the floor and taking small breaks to relieve stress all assist in preventing sprains and strains.
- Used correctly ergonomic PPE such as back supports, knee pads and kneeling pads can provide support, cushioning and serve as a reminder to use correct bending, lifting or kneeling techniques.

**SPEAK TO OUR  
SPECIALIST TODAY  
[SALES@PRYME.COM.AU](mailto:SALES@PRYME.COM.AU)**





# PROPER LIFTING

## FITTING A PROFLEX BACK SUPPORT

- ProFlex® Back Supports should fit snugly around your hips with the front of the support two-fingers width below your navel.
- The straps should be placed securely on your shoulders without causing tension.
- The hook & loop fasteners should be closed completely.



**1** Slip the back support on.



**2** Grasp each end of the waistband. Stretch the right end across the left and attach. The upper edge of the waistband should be below the navel. Fasten outer elastic bands loosely at your side.



**3** Adjust straps for a comfortable fit without tension.




**4** Before you lift - grasp the outer elastic bands and stretch forward as far as possible.




**5** Secure bands in comfortable position.


## EIGHT COMMANDMENTS OF LIFTING




**1** Plan your lift and test the load.




**2** Ask for help.




**3** Get a firm footing.




**4** Bend your knees.




**5** Tighten your stomach muscles.



**6** Lift with your legs.



**7** Keep the load close.



**8** Keep your back upright.



## DID YOU KNOW?

**SPRAINS // STRAINS ARE THE #1 INJURY  
RESULTING IN DAYS AWAY FROM WORK**



# PROFLEX

## ERGONOMICS

### BACK SUPPORTS

**NON-CONDUCTIVE  
POLYPROPYLENE STAYS**

**ADJUSTABLE,  
DETACHABLE  
SUSPENDERS**



**280D SPANDEX  
BODY MATERIAL**

**BLACK AND  
HV ORANGE**



## ECONOMY SPANDEX BACK SUPPORT



### KEY FEATURES:

- 8" (20.3cm) economical spandex body
- Non-conductive polypropylene stays
- 280D spandex body material
- Adjustable, detachable suspenders
- Rubber track webbing
- Stretchable bias binding with zig-zag stitching

**100/  
100HV**



Part No.	Description	UOM
<b>100   Black</b>		
11381 / 11382	XS / S	6 Units
11383	M	6 Units
11384 / 11385	L / XL	6 Units
11386 / 11387 / 11388	2XL / 3XL / 4XL	6 Units
<b>100HV   HV Orange</b>		
11881 / 11882	XS / S	6 Units
11883	M	6 Units
11884 / 11885	L / XL	6 Units
11886 / 11887 / 11888	2XL / 3XL / 4XL	6 Units

## STANDARD WEIGHT LIFTERS STYLE BACK SUPPORT



### KEY FEATURES:

- 7.75" (19.7cm) rigid foam body
- Durable 900D foam laminated nylon body fabric
- Foam lumbar pad

**1500**



Part No.	Description	UOM
11471	S	6 Units
11472	M	6 Units
11473 / 11474	L / XL	6 Units
11475	2XL	6 Units

### PROPER FIT

Use flexible measuring tape and find the circumference at your belly button.

Size	Fits Waist
XS	Up to 25" (64cm)
S	25-30" (64-76cm)
M	30-34" (76-86cm)
L	34-38" (86-97cm)
XL	38-42" (97-107cm)
2XL	42-46" (107-117cm)
3XL	46-52" (117-132cm)
4XL	52-58" (132-147cm)





# PROFLEX

## ERGONOMICS

### KNEE PADS

**BUCKLE OR HOOK +  
LOOP STRAP OPTIONS**

**CAP STYLES**  
FOR DIFFERENT  
KNEELING ACTIVITIES

335HL



**DURABLE NBR FOAM PADDING**  
MAXIMISES COMFORT + DURABILITY



## SLIP-RESISTANT RUBBER CAP



### KEY FEATURES:

- Slip-resistant long rubber cap to grip surfaces
- 840D nylon fabric cover
- 12mm NBR foam padding cut to hug the knee
- Nickel-plated grommets
- Buckle or hook & loop closure

**335HL**

Part No.	Description	UOM
18336	Black Cap	6 Pairs

## SHORT LIGHT DUTY COPOLYMER



### KEY FEATURES:

- Durable copolymer padding
- Super lightweight for comfortable all-day wear
- Single strap with hook & loop closure

**200**

Part No.	Description	UOM
18200	Black	6 Pairs

## WIDE SOFT CAP LEATHER



### KEY FEATURES:

- Leather cap for protection
- Provides protection against sparks/slag/fire (Not FR rated)
- 12mm NBR foam padding cut to hug the knee
- Slightly wider and longer for wraparound comfort
- Adjustable straps and buckle closure

**230LTR**

Part No.	Description	UOM
18232	Black and Leather Brown	6 Pairs





# PROFLEX

## ERGONOMICS

### KNEE PADS

**LIGHTWEIGHT GEL+  
EVA FOAM**  
FOR MOBILE COMFORT

**ROUND CAP**  
FOR HIGHEST DEGREE  
OF KNEELING MOBILITY



**NON-SLIP RUBBER CAP**  
**GRIPS KNEELING SURFACE**



## ROUND CAP LIGHTWEIGHT GEL



### KEY FEATURES:

- Round cap for highest degree of kneeling mobility
- Non-slip rubber cap grips kneeling surface
- Lightweight gel + EVA foam for mobile comfort
- Breathable perforated neoprene bottom strap
- Top elastic strap cinches tight with plastic clip

**367**

Part No.	Description	UOM
18467	Black	6 Pairs

## SHORT CAP INJECTED GEL



### KEY FEATURES:

- Short cap design for mobility when kneeling
- Non-slip rubber cap grips kneeling surface
- Injected gel + PU foam for all-day comfort
- Bottom webbing and top elastic straps
- Plastic clips cinch tight and keep straps secure

**355**

Part No.	Description	UOM
18455	Black	6 Pairs

## GEL FOAM



### KEY FEATURES:

- 12mm NBR gel padding & 20mm EVA padding
- 1680D ballistic nylon outer shell
- Slip-resistant durable 420D nylon-rubber surface
- Adjustable, breathable neoprene stretch strap
- Hook & loop closure

**350**

Part No.	Description	UOM
18350	Black	6 Pairs





[WWW.FOXGUNN.CO.NZ](http://WWW.FOXGUNN.CO.NZ)